


Integrated Sinks-

"Jenner"

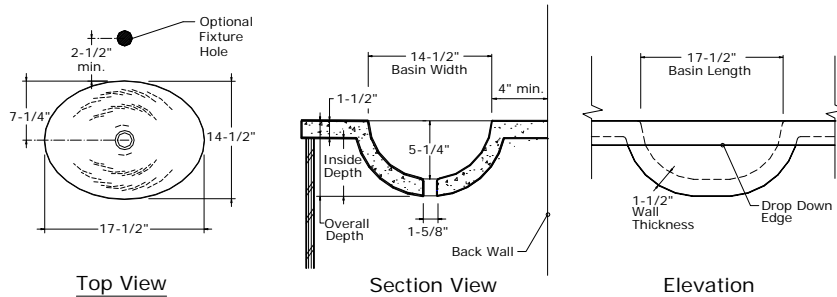

SPECIFICATIONS:

Description/Features:	Large Oval Bowl
Slab Depth	1 1/2"
Sink Wall Thickness	1 1/2" *
Basin Area	14 1/2" x 17 1/2"
Water Depth	5 1/4"
Inside Depth	5 1/4"
Overall Depth	6 3/4"
Drain Hole	1 5/8" diameter. Fits most 1-1/4" drain assemblies (not included).
Faucet Locations	Faucet holes optional. May be deck-mounted or wall-mounted.
Colors	Available in all standard, premium and custom colors
Placement	Cabinet, stand, wall-mounted, floating w/ brackets, ADA
Vanity Sizes	Sizes are based on custom orders at this time.
Installation Notes	A minimum of 4" clearance from the back edge of the sink to the wall is required for deck-mounted faucet placement. See drawing.
* Additional Information	The sink wall thickness should be taken into consideration when deciding on the sink and faucet locations. Contact us directly to obtain information about other sink styles and sizes.